



LHB100G4-4
LED Highbay 100W 4000K

LHB150G4-4
LED Highbay 150W 4000K

LHB200G4-4
LED Highbay 200W 4000K

LED Highbay

140 lm/W High Performance LED Highbay


Applications Warehousing, Workshops, Manufacturing facilities, Industrial

IP65



5 YEAR
WARRANTY

4000K

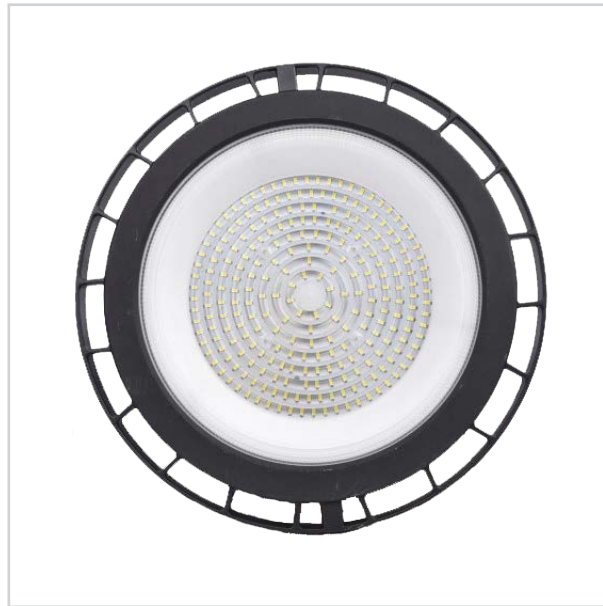

Specifications

Input Power
Lumen Output
Dimensions (Dia x H)
Dimming Options
Trim Colour
Warranty
IP Rating
IK Rating
Efficacy
LED
Colour Temp
CRI
Beam Angle
Supply Input
Power Factor
Useful life @Ta25° (L70)
Housing
Optic
Fixings/Hardware
Connection Type
Total Weight
Operating Ambient Temp.
Electrical Classification

LHB100G4-4

100W
15,000lm
φ270 x 107

LHB150G4-4

150W
22,500lm
φ310 x 108

LHB200G4-4

200W
30,000lm
φ365 x 123

1-10V Dimming (dimming driver required)

Black

5yr

IP65

IK10

150lm/W

SMD2835 Cree LED Chipset

4000K

>80

120° - 90° optical lens available

100-277V, 50/60Hz

>0.9

50,000hr

Die Cast Aluminium

Polycarbonate Diffuser

Mounting Bracket Eyelet

0.9m Flex & Plug

4kg

-30 to 60°C

Class 1

